

HAND PALLET TRUCK with PU WHEELS



Polyurethane Wheels are a popular choice due to numerous advantages:

Key Features and Benefits:

Reduced Noise: Polyurethane wheels are significantly quieter than those made from other materials, making them ideal for environments where noise reduction is important.

Smooth Ride: The soft, elastic nature of polyurethane provides a smoother ride, reducing vibration and improving operator comfort.

High Wear Resistance: Polyurethane wheels are highly resistant to abrasion and wear, ensuring a long service life.

Chemical Resistance: They are also resistant to a wide range of chemicals, making them suitable for various industrial applications.

Non-marking Floor Protection: Polyurethane wheels are typically non-marking, preventing damage to floors and surfaces.

Reduced Floor Wear: The soft material helps to absorb shock and reduce wear on floors.

Suitable for Various Surfaces: Polyurethane wheels can be used on a variety of surfaces, including concrete, asphalt, and even uneven terrain.


Wide Range of Applications: They are suitable for a wide range of industries, including warehousing, manufacturing, and retail.

Reduced Operator Fatigue: The smooth ride and reduced vibration can help to reduce operator fatigue.

Increased Productivity: By improving efficiency and reducing downtime, polyurethane wheels can contribute to increased productivity.



STANDARD TECHNICAL DATA

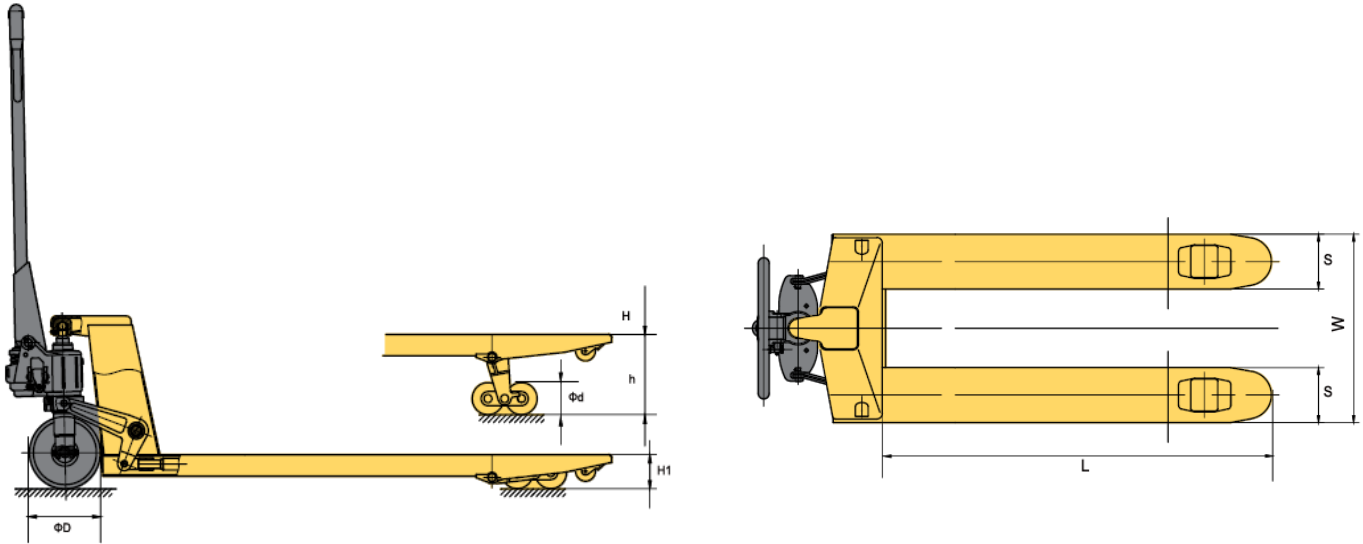

Product Code	LPTP	2555	3055
Load Capacity	kg	2500	3000
Wheel Type	Polyurethane		
Minimum Fork Height	(H1) mm	85	
Maximum Fork Height	(h) mm	115	
Maximum Lifting Height	(H) mm	200	
Fork Outside Width	(W) mm	550	
Fork Inside Width	(S) mm	160	
Fork Length	(L) mm	1150	
Fork Thickness	mm	3	3.75
Single Loading Wheel Size Diameter	mm	80x93	
Double Loading Wheel Size Diameter	mm	80x70	
Steering Wheel Size Diameter	mm	180x50	
Approximate Net Weight	kg	64	72